

Logitek Electronic Systems

ROC Reference Manual



Revision 1.0

Jul 2015

Logitek Electronic Systems, Inc.
5622 Edgemoor Drive
Houston, Texas 77081
USA

Tel 877-231-5870
+1-713-664-4470 (outside U.S. and Canada)

Fax +1-713-664-4479

Email support@logitekaudio.com

Web www.logitekaudio.com

Contents © 2015 Logitek Electronic Systems, Inc

Notice

Every effort has been made to supply complete and accurate information. However, Logitek Electronic Systems, Inc. assumes no responsibility for its use, nor any infringement of patents or other rights of third parties, which would result.

Worldwide rights reserved. Except for your own personal use, no part of this publication may be stored in a retrieval system, transmitted or reproduced in any way, including but not limited to photocopy, photograph, magnetic or other record, without the prior agreement and written permission of Logitek Electronic Systems, Inc.

Logitek, JetStream, and ROC are trademarks of Logitek Electronic Systems, Inc.

All other trademarks acknowledged.

All specifications are subject to change without notice.

Document Revisions

Date	Revision	Author	Notes
April 2012	0.5	John Davis	Preliminary release of ROC manual
July 2015	1.0	John Davis	Adding fader/softkey lamp color commands

Contents

Document Revisions	3
Contents	4
1 Introduction	7
About this Manual	7
Intended Audience	7
Manual Conventions.....	7
About the ROC	8
System Requirements	9
System Architecture	9
Compatibility Matrix	10
2 Unpacking.....	11
Parts List.....	11
Unpacking.....	11
Contacting Logitek.....	11
3 Physical Installation.....	12
Power Supply Unit	12
ROC Frames.....	12
ROC-F9 9 Slot Frame.....	12
ROC-F12 12 Slot Frame.....	12
ROC-F18 18 Slot Frame.....	12
ROC-24 Frame	12
Meter Bridges (ROC-SMeter, ROC-LMeter).....	13
Mounting.....	13
Connections	13
PSU	14
Headphones.....	15
GPIs	15
Internal Module Connections.....	16
4 Configuration.....	17
JetStream Configuration.....	17

Audio Engine Configuration	17
CommandBuilder Triggers.....	17
Device & Bus Addressing.....	18
Modules	18
Device Numbers.....	18
Softkey Addressing.....	18
Monitor Softkey Colors	20
Monitor Hotkey Addressing.....	21
Switched Meter Addressing (Meter Bridges only)	22
Meter Bridge On Air and Mic Live Tally Lamps.....	22
Fader On/Off Button Color Changes	23
5 Operation.....	24
ROC Modules	25
ROC-FADER (Fader Module) – International (non-UK) Layout	25
ROC-FADER (Fader Module) – UK Layo	26
ROC-MON (Monitor Module)	27
Using the Change Function	28
ROC-SOFT (Optional Softkey Module)	29
Using Command Builder to program the Router Positions	32
Variable Select Trigger Example	32
Route Select Trigger Example	33
6 Maintenance	35
Warranty	35
Firmware Updates	35
Component Replacement.....	35
Fader Replacement.....	35
Module swap-out	37
More Assistance.....	37
Appendix A Release Notes	38
Known Issues.....	38
Appendix B Specifications.....	39

ROC Frames.....	39
ROC-F9 Frame	39
ROC-F12 Frame	39
ROC-F18 Frame	39
ROC-F24 Frame	39
ROC Modules	39
Fader Module	39
Monitor Module	39
Meter Bridges.....	40
ROC-SMETER Meter Bridge.....	40
ROC-LMETER Meter Bridge	40
ROC Power Supply.....	40
Appendix C Pinouts.....	41
To JetStream (DATA and HEADPHONES).....	41
Power Supply to Console.....	41
GPIs.....	42
GPI Outputs	42
GPI Inputs	42
Two Year Limited Warranty.....	43

1 Introduction

About this Manual

This manual describes the installation and operation of the **Logitek ROC** control surface.

Intended Audience

This manual is aimed at Engineers responsible for installing, configuring and supporting a **Logitek Networked Console System** with the *ROC* surface.

In the context of a system installation, or to become familiar with the entire **Logitek Networked Console System**, the reader should also reference:

- JetStream Reference Manual
- AEConfig or JetSet Reference Manual
- CommandBuilder Reference Manual

Manual Conventions

The following conventions are used in this manual:

This text indicates a menu choice to be made, with an arrow separating a multi-level selection, eg Control Panel ➤ Users & Passwords. This can be a menu choice in a Logitek application, or within Windows.

↪ *Indicates a “see-also” section in this manual, or another Logitek manual.*

The exclamation symbol signifies an important note or critical information.

This text represents a command, script block example, instruction to be typed, or directory path.

 **TIP:** A useful tip from our knowledge base!

About the ROC

The *ROC* control surface from **Logitek Electronic Systems** brings you the flexibility of a router based audio console system with the look, feel and easy handling that novice operators will understand, and experienced console operators will appreciate.

The *ROC* offers full access to the sources available on **Logitek's JetStream** routers, along with simple bus selection and intuitive monitor controls. The *ROC* is compatible with the **Logitek Audio Engine** provided that the engine has an AE-C6 card with version 3.77 or higher.

The *ROC* surface can be configured with 6, 12, 18 or 24 Faders. There is also a Monitor Module containing the Monitoring and Selection functions and optional softkey and selector modules may be added for additional flexibility. The module types include:

- | | |
|---------------------------|---|
| ➤ <i>ROC-FADER</i> | 6 Fader Module |
| ➤ <i>ROC-MON</i> | Monitor Control Module |
| ➤ <i>ROC-SOFT</i> | Additional Softkey Button Module |
| ➤ <i>ROC-SEL</i> | 5 Channel Router Controller |

In addition, two **Meter Bridges (ROC-SMeter & ROCLMeter)** are available. The ***SMeter*** bridge is short; the ***LMeter*** is long.

The main frame is available in a number of different sizes to accommodate the variety of fader numbers. The frame is designed to be mounted on a desk for semi-permanent installation, but as no cutouts are required it can easily be relocated.

System Requirements

ROC is designed to connect to a **Logitek JetStream** running DSP version 4.x. Contact **Logitek Electronic Systems** or your reseller if you are unsure of compatibility, or are adding a ROC surface to a pre-existing **Logitek** facility.

System Architecture

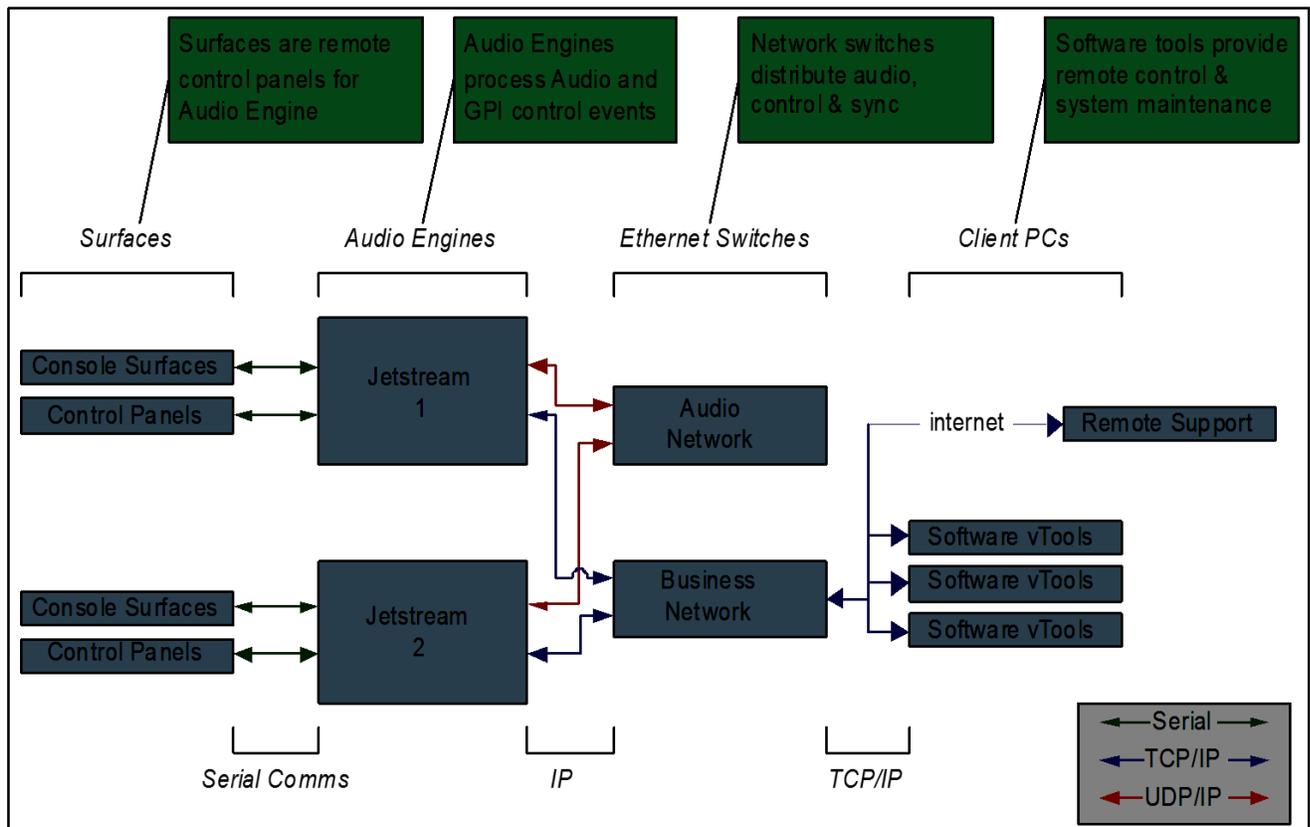


Figure 1 -Logitek System Architecture (v4.x)

Put simply, the ROC surface is just a remote control panel for the JetStream. Unlike traditional analog consoles, no audio passes through the ROC or its faders (with the exception of the cue speaker audio). The ROC talks to the JetStream using the Logitek Command Protocol, with all audio processing occurring inside the router. The mixing, routing and processing of audio is not dependent upon the embedded PC included with the JetNet Audio Networking Module. However, additional functionality, such as macro buttons, scene snapshots, intercoms, delay control and software tools interface to the system using the JetStream Server application that is bundled with the module.

Compatibility Matrix

ROC is designed for use with the **JetStream Router** v4.x and **AE-32 Audio Engine** v3.77 and higher.

The *ROC* retains compatibility with other surfaces for the majority of its features.

Following is the minimum software release version/date that is required for *ROC* support.

Component	General Support	Additional Features
JSM-DSP Controller	v1.41	
JetStream Server	v4.0	
CommandBuilder	v3.6	
AEConfig	v3.6	
JetSet	V1.0	

2 Unpacking

This section details what you should do when unpacking your newly arrived *ROC* surface.

Parts List

The exact list of parts received will vary depending on your order, but should generally include:

- 1 x *ROC* Power Supply
- 1 x fully assembled *ROC* frame, containing modules as ordered
- 1 x meter bridge assembly (option)

You will receive a parts list with the system that is specific to the modules on your order.

Unpacking

Carefully unpack the cartons whilst looking for any signs of shipping damage. You may wish to save the shipping cartons until the operation of the system is verified.

Report any damage to the shipping carrier immediately. Verify that the contents of each box match the packing list and report any discrepancies immediately to **Logitek** in writing.

Contacting Logitek

In the event of a shipping problem, you can contact **Logitek Electronic Systems** in several ways:

U.S. Mail	Logitek Electronic Systems, Inc. 5622 Edgemoor Drive Houston, Texas 77081 USA
Telephone	877-231-5870 +1-713-664-4470 (outside U.S. and Canada)
Fax	+1-713-664-4479
Email	support@logitekaudio.com
Website	www.logitekaudio.com

International customers should contact their local authorized **Logitek** dealer for assistance.

3 Physical Installation

The *ROC* surface is designed to be mounted on a desk in a semi-permanent studio installation. The **Meter Bridge**, if optional, can be screwed to the back of the *ROC*.

Power Supply Unit

The **Power Supply Unit** is an external supply.

Power inlet is via a single IEC connector on the rear of the **Power Supply Unit**. A power cable is supplied only for US installations. International customers may contact their reseller for the supply of power cables if required.

As the power supplies are of switch-mode type, there is no voltage selection required.

ROC Frames

A number of *ROC* frame sizes are available, depending on the total number of faders. Each module takes up either one or two “slots” in the frame. The **Monitor** module occupies half the slot space of a **Fader** module.

The frame will be shipped with the modules connected and fitted as ordered. These modules are not intended to be moved, however **Fader** modules are interchangeable. The internal COM port connections determine the device addressing for each modules.

ROC-F9 9 Slot Frame

- Houses 1x ROC-FADER & 1x ROC-MON
- 12.9” W x 14.3” D x 2.5” H (328mm x 368mm x 63mm)

ROC-F12 12 Slot Frame

- Houses 2x ROC-FADER & 1x ROC-MON
- 16.8” W x 14.3” D x 2.5” H (427mm x 368mm x 63mm)

ROC-F18 18 Slot Frame

- Houses 3x ROC-FADER & 1x ROC-MON
- 25.6” W x 14.3” D x 2.5” H (625mm x 368mm x 63mm)

ROC-24 Frame

- Houses 4x ROC-FADER & 1x ROC-MON
- 33.95” W x 15.4” D x 2.6” H (862mm x 391mm x 66mm)

Meter Bridges (ROC-SMeter, ROC-LMeter)

Hardware LED **Meter Bridges** are available as an option. The **Meter** includes two high-resolution meters – one for Program bus and one switched (follows Monitor selection).

- 🔊 **TIP:** If the ROC is powered on without being connected to the JetStream, all meter LEDs will illuminate. This is normal operation; the LEDs will turn off after being connected to the JetStream and the console begins to receive meter data.

Mounting


- The **Meter** option is supplied separately and attaches to the back of the **ROC** frame with screws (included).
- The RJ-11 cable from the **Meter** plugs into the ROC tray card at the far right into the jack labeled “Meter.”
- The **Meter** is hinged. Gently tighten the black center screw on the rear of the hinge to lock the meter into place at the desired angle.



Illustration 1: ROC-SMeter

Connections

The **ROC** frame contains the control circuitry for the console. It connects to the **Logitek JetStream Router** via a serial link. Headphone audio pass-through connectors are also provided for convenience.

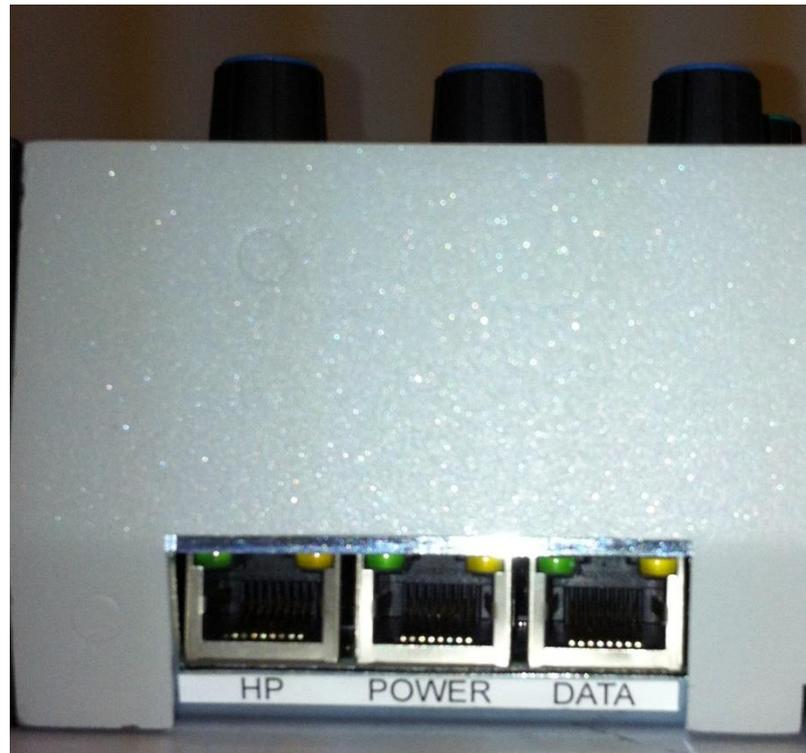

HP: Headphones connection. Plug a straight-through CAT-5 with RJ-45 connectors into this jack on the console to a stereo analog output on the JetStream/Audio Engine that is fed by the JetStream/Audio Engine Headphones Out mix bus.

POWER: Use the supplied RJ-45 to DB-9 connector to plug the console into the Remora Power Supply.

DATA: Use a straight-through CAT-5 with RJ-45 connectors to connect the console to the JetStream DSP card (Surface port) or Audio Engine AE-C6 card.

You can use a dedicated CAT5 patch cable or existing structured cabling. If using structured cabling systems, care should be exercised to ensure the serial connections are not confused with other network outlets and that the link is not unintentionally “un-patched”.

PSU

The ROC is powered by an external power supply, included with the console. Connect the supply to mains using an IEC style inlet lead and the 12VDC to the rear of the ROC using the supplied DB-9 to RJ-45 connection marked **SURFACE**.



DB-15 connectors are provided on the ROC Power Supply for GPI Input and Output connections. A ground lug is provided on the chassis for your convenience.

Headphones

The ROC frame has a rear connection for Headphones input, which is internally wired to 1/4" (6.35mm) and 1/8" (3.5mm) headphone sockets at the front. This provides for convenient headphone connection without the need to mount an in-desk or under-desk socket.

Connection from the ROC to **JetStream Router** is via a straight-through patch cable to a **JetStream JSM-AOUT-RJ** analog output card, which is suitable for driving headphones directly.

If connecting to a JSM-AOUT-DB card or an Audio Engine IO24A card, wiring is to the *StudioHUB+* standard.

↪ *See Appendix C for connector pinouts.*

GPIs

The ROC **Surface** has 12 GPI inputs and 12 GPI outputs for control of local studio devices.

GPI outputs are driven by optically-isolated, non-polarized, solid state switches, rated at 500ma to a maximum voltage of 24V AC/DC, with surge to 2A. These solid state devices do not conduct at low voltage, so cannot switch an audio input. However, they are suitable for most control signals, and avoid problems with relay contacts being damaged by surges. Caution should be exercised to avoid overloading the switches. If driving a high current device, we recommend using an external relay.

The GPI inputs are a current source to +3.3VDC that is pulled to ground to activate. This makes it suitable for control by push-button, relay or open collector. A diode protects against static and over voltage up to 18V. See the wiring diagram for polarity information if using non-standard activation methods. A common ground is provided for input connection.

As wiring schemes vary from station to station, these cables are not supplied with the surface, but are available from **Logitek Electronic Systems** or your local Logitek dealer.

↪ *See Appendix C for connector pinouts.*

Internal Module Connections

Inside the frame, four RJ11 port connectors are provided for connecting to each **Fader** module. These are provided as a straight-through flat cable and connect to the appropriate ports marked 1-6, 7-12, 13-18, 19-24.

The **ROC-SOFT** and **ROC-SEL** connect to the RJ-11 ports marked Soft 1 and Soft 2.

The **Monitor** module connects to the RJ-11 port marked Monitor.

The **Meter** connects to the RJ-11 port marked Meter..

4 Configuration

This chapter covers basic configuration information, relating specifically to the *ROC* surface. **JetStream** setup and configuration is covered in detail in the following manuals:

- *Logitek JetStream Reference Manual*
- *Logitek AEConfig Reference Manual*

JetStream Configuration

Configuration of the **JetStream Router** is done in *JetSet*. Set the number of faders in *JetSet* to match the number of faders on the console.

- ➔ *See the JetStream Reference Manual for information on configuring JetStreams*

Audio Engine Configuration

Configuration of the Audio Engine is done in *AE Config*.

Currently, *AEConfig* does not include specific DSP table entries for the *ROC*. You should use a Mosaic surface of the appropriate size when configuring a *ROC*. In the future, specific *ROC* support will be added to *AEConfig*, however, the two consoles are compatible in DSP allocations. Ignore the entries for *ROC-5* and *ROC-10*; those are used in the 1990's era *ROC* console.

- ➔ *See the Audio Engine Reference Manual for information on configuring Audio Engines.*

CommandBuilder Triggers

The *ROC* surface contains many programmable buttons and features. These features are scripted in "triggers" in *CommandBuilder*, and executed by *JetStream Server*, which is included with the *JetNet Audio Networking Module*.

- ➔ *See the CommandBuilder User's Manual for information on writing Triggers.*

The *CommandBuilder* manual includes details and examples of *ROC* specific features, such as Monitor Hotkeys, Softkey Buttons and more. The programming of these features does require a certain level of familiarity with the system. If you need assistance, please contact **Logitek Electronic Systems** or your reseller.

Device & Bus Addressing

Each device (such as a fader input or button panel) requires its own **Device Number**. Within that device, each button, lamp and feature has a **Bus Number**. Together, the **Device** and **Bus Numbers** allow the **JetStream** and **Surface** to communicate.

When configuring the *ROC's* programmable buttons in *CommandBuilder*, you will require the **Device Number** and **Bus Number** for each button or lamp. The information below will help you determine the addressing scheme in use on your *ROC*.

Modules

Module	How Addressing is determined	Max Modules Supported
ROC-MON	Uses the standard Monitor, Headphones, Guest/Studio & Cue Gain addressing	1
ROC-FADER	Device Set determined by COM port allocation (pre-defined)	4 modules (24 faders)
ROC-METER	Uses standard PGM Meter addressing	1

Device Numbers

In *ROC v1.x* the **Device Number** of a module is determined by its firmware and position.

Softkey Addressing

The twelve softkeys on the monitor module follow the **Numix** Bridge Button addressing scheme, therefore the `Bridge Button` and `Bridge Lamp` keywords in **Command Builder** may be used.

The softkey buttons for a console connected to JetStream port 1 are on device 28 and the lamps are on device 27. For port 2, use device 50 for buttons and 4F for lamps. For port 3, use device 64 for buttons and 63 for lamps. Bus numbers are 32-43.

For example, button #1 on a console connected to JetStream port 1 is device 28 bus 32 and its corresponding lamp is device 27 bus 32. Alternatively, it is valid to address button #1 on port 1 as `surf 1 bridgebutton 1` and its corresponding lamp as `surf 1 bridgelamp 1`. Command Builder will translate those keywords into the appropriate device and bus numbers.

Port 1 – Button device 28/lamp device 27

Button	1	2	3	4	5	6	7	8	9	10	11	12
Bus	32	33	34	35	36	37	38	39	40	41	42	43

Port 2 – Button device 50/lamp device 4F

Button	1	2	3	4	5	6	7	8	9	10	11	12
Bus	32	33	34	35	36	37	38	39	40	41	42	43

Port 3 – Button device 64/lamp device 63

Button	1	2	3	4	5	6	7	8	9	10	11	12
Bus	32	33	34	35	36	37	38	39	40	41	42	43

Monitor Softkey Colors

The 12 monitor softkeys may be set to any of 256 RGB colors. The colors may be set through assembly language commands as follows in Command Builder:

```
cmd ae1 asm "02 06 B1 dd bb 07 RG B0"
```

where

dd = device number of the lamp expressed in hex (port 1 = 27, port 2 = 4f, port 3 = 63)

bb = bus number of lamp expressed in hex (20 – 2b)

R = red brightness 0 – F (hex)

G = green brightness 0 – F (hex)

B = blue brightness 0 – F (hex)

Some suggested color combination values (listed as RGB):

Red	F00	Purple	30F
Green	0F0	Light Aqua	2EB
Blue	00F	Dark Aqua	09F
White	FFF	Orange	FC0
Blue White	4CF	Yellow	9F0
Crimson	400	Magenta	F0F

For example, to set button 1 on surface 1 to blue, the command would read:

```
cmd ae1 asm "02 06 b1 27 20 07 00 F0"
```

To set the same button light aqua:

```
cmd ae1 asm "02 06 b1 27 20 2E B0"
```

Most stations will place these commands in the init trigger in Command Builder to run at Supervisor/JetStream Server startup and the lamp would appear at that color the next time it is turned on. However if you wish to change the color of the button dynamically based on a condition changing, you could add the color set command to virtually any trigger to change the color of the button; if the lamp is lit the color would change when that trigger runs and if the lamp is not lit, the color will appear the next time the lamp turns on.

Monitor Hotkey Addressing

There are four monitor hotkeys that may be addressed in Command Builder to route sources to the control room monitors, headphones, and studio monitors.

The buttons are labeled SEL1, SEL2, SEL3, and SEL4.



Illustration 2: Monitor Hotkeys

SEL 1 is bus 16. SEL 2 is bus 17. SEL 3 is bus 18, and SEL4 is bus 19.

The device numbers are as follows:

Port Number	Monitor	Headphones	Studio
1	Device 24	Device 25	Device 23
2	Device 4C	Device 4D	Device 4B
3	Device 62	Device 65	Device 61

Alternatively, d[device] notation in Command Builder, such as d[Port1 Monitor In] is valid and will be properly translated by Command Builder.

Switched Meter Addressing (Meter Bridges only)

The Switched meter defaults to displaying whatever source is routed to Monitor In. When bus 0 is turned on for the Monitor Meter in device, the meter will switch to whatever source is routed to the Monitor Meter In.

Monitor Meter In Device Numbers:

Port (Surface) Number	Device Number
1	2c
2	54
3	6a

In Command Builder, sources should be routed to `d[Port1 Monitor Meter In]` (or appropriate port number) using the Alt+D pick list. Command Builder will translate this into the appropriate hex device number.

Meter Bridge On Air and Mic Live Tally Lamps

Two tally LEDs are provided on the ROC-SMETER and ROC LMETER. The Mic Live tally may be used to tell the operator that the mic is on. The On Air tally may be used to tell the operator that the console has been switched to air. The bus number of the Mic Live LED is 17 and the On Air LED is 18. The device numbers are in the chart below.

Device Numbers for Mic Live and On Air Tally Lamps

Port (Surface) Number	Device Number
1	28
2	4F
3	63

Because these LEDs are on the same device number as console GPI outputs, an easy way to program the Mic Live lamp is to enter 117 into the Mute Tally box for each Mic on port 1. For port 2 consoles, use 217. For port 3 consoles, use 317.

Fader On/Off Button Color Changes

The default channel on/off button colors are green for on and red for off. Starting with JetStream version 5, the channel on/off colors for specific inputs may be set in JetSet when you edit the input on the Local IO page.

For Audio Engines and JetStreams that are version 4 and below, triggers in Command Builder are used instead.

As the ROC is based on the Mosaic console, we use the same commands in Command Builder to set these colors in the ROC as in the Mosaic.

Channel On:

```
cmd ae1 fader 1 chon set color mosaic RGB001500
```

Channel Off:

```
cmd ae1 fader 1 choff set color mosaic RGB150000
```

Here are some RGB color values that you can use:

Red	RGB150000	Purple	RGB030015
Green	RGB001500	Light Aqua	RGB021411
Blue	RGB000015	Dark Aqua	RGB000915
White	RGB151515	Orange	RGB151200
Crimson	RGB040000	Yellow	RGB091500
BlueWhite	RGB041215	Magenta	RGB150015


Most customers place these triggers in the Command Builder init trigger so they run when Supervisor/JetStream Server starts. If you need the button colors to change dynamically, you can place these commands in any trigger to change on the condition that you specify. The button will remain in this color until the color is changed again or a default reset brings the color back to default.

5 Operation

Your **Logitek ROC** console has been designed for easy and quick access to the functions you most need. If you've had experience with broadcast consoles before, you'll soon be at home, finding your way around quite easily.

Logitek Electronic Systems has been manufacturing broadcast consoles for decades, so we understand how to make control surfaces that are both powerful and straightforward. During the design of the *ROC*, customers and operators provided feedback that helped shape the final product. So we're confident you'll find the *ROC* a joy to use on-air.

Following is a look at each of the *ROC* modules, and how the standard functions are used.

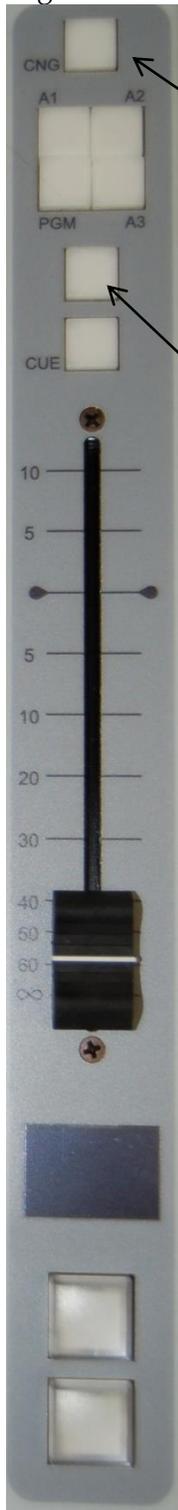

ROC Modules

ROC-FADER (Fader Module) – International (non-UK) Layout

CNG – Change button. Press to route a new source to this fader. Use the select knob on the monitor module to scroll through the sources on the OLED display below the fader. Press Take on the monitor module to select the source; Cancel to clear change mode. Change mode will also automatically turn off after 5 seconds of inactivity.

P/Soft button – This button turns on bus 14 for the fader. By default, if a source with a mix minus bus is routed here, the talkback mic will be sent to the mix minus. If no mix minus bus is associated with the source, a trigger may be written in Command Builder to perform another function when the button is pressed.

Cue button – Press to listen to the source through the internal cue speaker regardless of fader position or whether the channel is on or off.

Fader – Adjusts level for the selected mixing busses.

OLED Display – Text shows channel assignment. A pre-fader meter appears below the text.

Turns fader on

Turns fader off

P button – Program bus select. Press to send this channel to the program mixing bus. The lamp on the button will illuminate to show whether the bus is assigned or not. The lamp will glow at half brightness when the channel is off and full brightness when the channel is on.

A1 button – Aux 1 bus select. Press to send this channel to the Aux 1 mixing bus. The lamp on the button will illuminate to show whether the bus is assigned or not. The lamp will glow at half brightness when the channel is off and full brightness when the channel is on.

A2 button – Aux 2 bus select. Press to send this channel to the Aux 2 mixing bus. The lamp on the button will illuminate to show whether the bus is assigned or not. The lamp will glow at half brightness when the channel is off and full brightness when the channel is on.

A3 button – Aux 3 bus select. Press to send this channel to the Aux 3 mixing bus. The lamp on the button will illuminate to show whether the bus is assigned or not. The lamp will glow at half brightness when the channel is off and full brightness when the channel is on.

ROC-FADER (Fader Module) – UK Layo



CNG – Change button. Press to route a new source to this fader. Use the select knob on the monitor module to scroll through the sources on the OLED display below the fader. Press Take on the monitor module to select the source; Cancel to clear change mode. Change mode will also automatically turn off after 5 seconds of inactivity.

TB/Soft button – This button turns on bus 14 for the fader. By default, if a source with a mix minus bus is routed here, the talkback mic will be sent to the mix minus. If no mix minus bus is associated with the source, a trigger may be written in Command Builder to perform another function when the button is pressed.

Fader – Adjusts level for the selected mixing busses. Turns channel on and off when raised from infinity.

OLED Display – Text shows channel assignment. A pre-fader meter appears below the text.

Machine Start

PFL (Pre Fader Listen)

P button – Program (Desk) bus select. Press to send this channel to the program mixing bus. The lamp on the button will illuminate to show whether the bus is assigned or not. The lamp will glow at half brightness when the channel is off and full brightness when the channel is on.

A1 button – Aux 1 bus select. Press to send this channel to the Aux 1 mixing bus. The lamp on the button will illuminate to show whether the bus is assigned or not. The lamp will glow at half brightness when the channel is off and full brightness when the channel is on.

A2 button – Aux 2 bus select. Press to send this channel to the Aux 2 mixing bus. The lamp on the button will illuminate to show whether the bus is assigned or not. The lamp will glow at half brightness when the channel is off and full brightness when the channel is on.

A3 button – Aux 3 bus select. Press to send this channel to the Aux 3 mixing bus. The lamp on the button will illuminate to show whether the bus is assigned or not. The lamp will glow at half brightness when the channel is off and full brightness when the channel is on.

ROC-MON (Monitor Module)

Use the SELECT wheel to change the input selection on the Fader or Monitoring source after pressing the CNG (Change) button. Winding the SELECT wheel will cycle through the available inputs, displaying on the relevant screen. Press TAKE to accept, or CANCEL to cancel the change.

12 Softkey buttons are user programmable and are commonly used for intercoms, delay control, and snapshot/recall functions. A special command in Command Builder can toggle these buttons between softkeys and use as a numeric keypad.

The SPLIT button switches the headphones to put the monitored source in left and CUE (UK: PFL) in right. The DIM button reduces the volume of the control room monitors when pressed.

Use the CNG buttons to access the source change function for each of the monitoring destinations.

The OLED screen displays the current source for each monitoring send. When the relevant CNG button is pressed, you can scroll through the selection list to select a new source.



While a fader is in change mode, use the COMP button to access Compressor settings, EQ button to access EQ settings, MAIN button to access Pan and Mode settings, and MISC button to access miscellaneous settings on the meter bridge. Press and turn the 1, 2, and 3 knobs to navigate the menu on the meter bridge.

The RST button resets and the RUN button starts the timer on the meter bridge.

The TB RETURN knob controls the level of incoming audio from other studio intercoms. The CUE knob controls the cue audio level (labeled as PFL in the UK).

Use the TB button to talk back to the guest headphone/studio monitor output. This button activates bus 14 on Studio In (port 1 device 23, port 2 device 4B, port 3, device 61)

Four hotkey buttons are available for headphones, monitor, and guest/studio for quick access to common sources.

Turn the HEADPHONES, MONITOR or STUDIO gain knobs to increase (clockwise) or decrease (anticlockwise) the level going to the relevant monitoring send.

Using the Change Function

When you press Change over a fader, the select portion of the Monitor Module reacts as follows in the following modes:

Main

The change function always defaults to this mode. Press the Main button to return to this mode from another mode if desired.

Turn the red Select knob to change the source over a fader. Press Take to confirm.

The monitor module will light up with 3 additional options in three columns on the meter bridge under the monitor meter: Trim, pan (balance), and mode. Turn the green knob that corresponds with the column to adjust each control. Press Take to confirm.

The green LED will light next to each active green knob when there is something that you are allowed to change. If the trim, pan, and mode controls do not light up, those functions have been locked out in the JetStream or Audio Engine configuration software.

Comp (Compression/Limiting)

Press the Comp button to enter this mode while change is active. Several pages of compressor controls are available in this menu displayed under the monitor meter on the meter bridge. Use the red Select knob to change pages. Turn the green knob that corresponds with the column (left, center, right) to adjust the settings displayed on the meter bridge. Press the right hand knob to set compression IN or OUT as desired. If Allow Effects is not set to Yes for the source in the JetStream/Audio Engine configuration software, this menu will be completely turned off.

EQ (Equilization)

Press the EQ button to enter this mode while change is active. Several pages of EQ controls are available, and the red Select knob changes the pages displayed under the monitor meter on the meter bridge. Turn the green knob that matches the column. Press the far right green knob to set EQ IN or OUT as desired. If Allow Effects is not set to yes for the source, the menu will be completely turned off.

MISC (Miscellaneous)

Reserved for future use. Currently, pressing this button sends change mode back to Main.

ROC-SOFT (Optional Softkey Module)

For customers who need more than 12 softkeys, Logitek offers an expansion softkey module. Two expansion ports are available for any combination of ROC-SOFT and ROC-SEL modules.

The buttons are addressed in Command Builder by device number and bus number. The device number corresponds to the port inside the ROC tray where the module is connected. The bus number corresponds to the button on the module. There are separate device numbers for lamp and switch so they may be addressed separately.

In addition, the device numbers are different depending upon which surface port the console is connected to on the JetStream or Audio Engine.

The matrix below will help you determine the correct device number. (expressed in hexadecimal format)

AE/JSM Port	Expansion 1 Lamp	Expansion 1 Switch	Expansion 2 Lamp	Expansion 2 Switch
1	2d	2e	2f	30
2	55	56	57	58
3	Use a fader port	Use a fader port	Use a fader port	Use a fader port



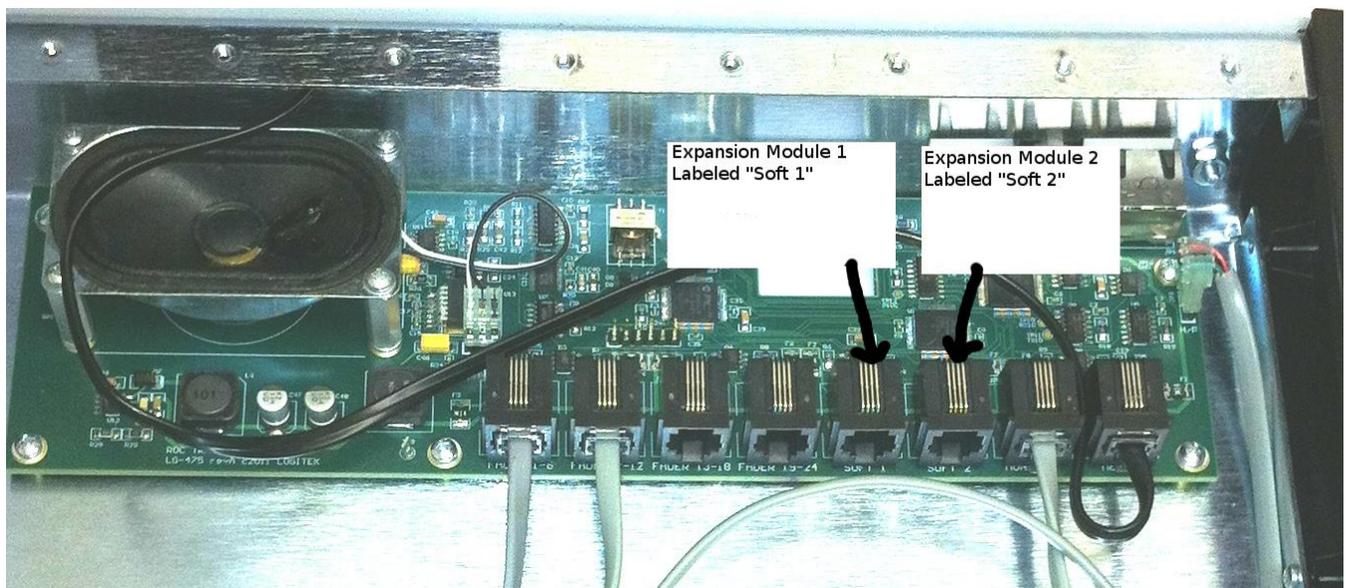


Illustration 3: Softkey Expansion Module Connections on ROC Tray

The Bus numbers are shown on the following page.

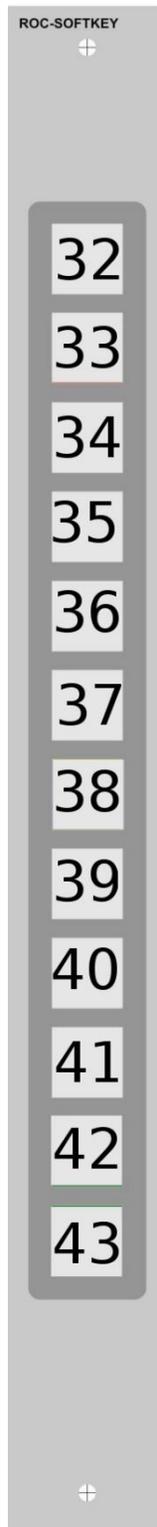

ROC Softkey Bus Numbers

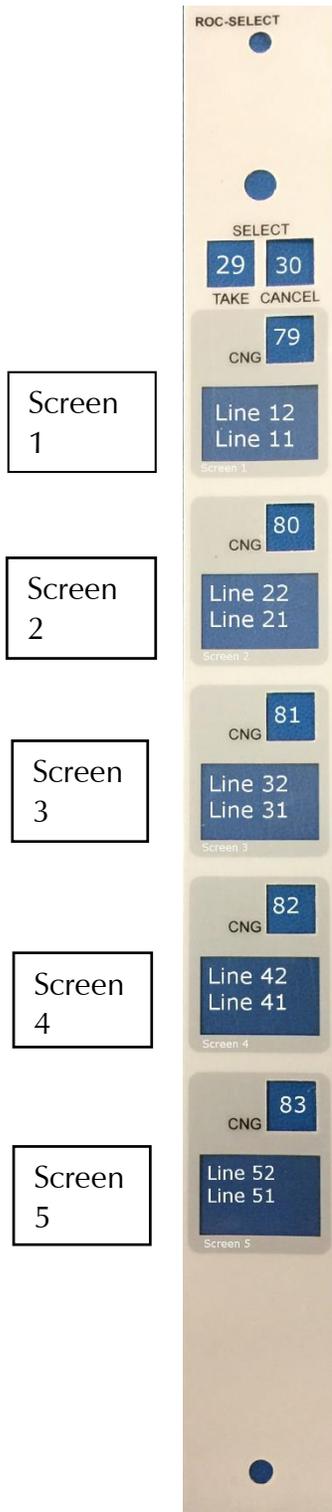

ROC-SEL Select Panel bus numbers and text positions.

Using Command Builder to program the Router Positions

There are two types of triggers that may be used to program the optional ROC-SEL routers: Variable Select and Route Select.

A Variable Select allows you to perform multiple commands, including routes, from a pick list. The pick list is defined as part of the trigger.

A Route Select allows you to choose a destination on the router and route any allowed source to that destination. The pick list is defined by the sources ticked as allowed in the Output Selections page of the configuration software.

The Command Builder manual defines these commands in further detail. There are special keywords that should be used in these triggers. An example of each type of trigger is provided below. In the Command Builder manual, we will use the DISPLAY keyword and the SOURCENAME keyword instead to make the magic happen.

Variable Select Trigger Example

This trigger assumes that a variable called "ISDN1" has been defined on the System Page of Command Builder.

You need to know the device number of the ROC-SEL. If you are plugged into the expansion port, use the address that matches the port on page 29. If you are plugged into the fader port, use the first 2 addresses of the faders associated with the port your selector is plugged into.

The button is the higher of the 2 addresses. The lamp and screen are the lower of the 2 addresses. For example, expansion port 1 on a ROC plugged into COM 1 on the JetStream uses device 2d for the lamps and screen and 2e for the button.

If you know your way around triggers, you'll notice that we turn on the lamp for our button when we begin but do not turn it off on ACCEPT. The console is smart enough to do that for you. We do turn the lamp off on CANCEL just to give Cancel something to do. Finally, don't skip the IF CANCEL WAIT section, or else Command Builder will throw an error. You can adjust the number of seconds you have to make a selection before it all times out by adjusting the WAIT time on the IF CANCEL.

Text after a tilde ~ is a comment. s[Source] and d[destination] brackets use unique names defined by JetSet and picked via the alt+D command in Command Builder. Your s[sources] and d[destinations] will vary.

Logitek ROC Reference Manual

Page 33

```
trigger ae1 device2e bus 79 on

cmd ae1 text device2d line11 "ISDN1 Select" ~ writes text to the bottom line of screen 1
cmd ae1 vISDN1 set selection mode display ( device 2d screen 1 ) ~ activates selection screen

cmd ae1 text selection 1 "Program"
cmd ae1 text selection 2 "Aux 1"
cmd ae1 text selection 3 "Mix Minus"

if accept selection = 1
  cmd ae1 route s[Port 1 Program] to d[to ISDN 1]
  cmd ae1 sourcename d[to ISDN 1] display ( device2d line12 pos1 )
endif

if accept selection = 2
  cmd ae1 route s[Port 1 Aux 1] to d[to ISDN 1]
  cmd ae1 sourcename d[to ISDN 1] display ( device2d line12 pos1 )
endif

if accept selection = 3
  cmd ae1 route s[Port 1 MM 1] to d[to ISDN 1]
  cmd ae1 sourcename d[to ISDN 1] display ( device2d line12 pos1 )
endif

if cancel wait 5
  cmd ae1 device2d bus79 off
endif
```

In our example, we only routed the source and wrote the name of the source to the screen. If you wanted to do more, like pulse relays or send text to other studios, you would place those commands before the ENDIF that closes the IF ACCEPT or IF CANCEL WAIT.

Route Select Trigger Example

The Route Select is a lot simpler than the Variable Select. All you really need to know here is the device number where you want to change the route, and you need some sources allowed in Output Selections in the config software so it knows what to pick. Also, you need to set a variable that is unique to the trigger so Command Builder has a place to hang the selection.

The surface takes care of all of the lamps in this trigger. Putting the lamp off command in the IF CANCEL WAIT gives that if statement something to do.

In our example, we are changing routes on destination device 70 and we're using a variable set on the Command Builder system page called ISDN2.

```
trigger ae1 device2e bus 80 on

  cmd ae1 text device2d line 21 "ISDN2"
```

```
cmd ae1 vISDN2 set route selection mode device70 display ( device2d  
screen 2 )
```

```
if cancel wait 5  
cmd ae1 device2d bus80 off  
endif
```

6 Maintenance

The *ROC* uses multi-layer boards with surface mount technology. As such, the majority of the console is not user-serviceable. However, there are some basic tasks that can be performed by suitably qualified technical personnel.

Warranty

Logitek Electronic Systems will honor the warranty of the system when conducting field maintenance, provided:

- Repairs or updates only relate to recommended and documented procedures
- Care is taken and procedures are followed
- Repairs are conducted by suitably trained or experienced service personnel

If you do not feel comfortable performing maintenance or repairs, please do not proceed. If you would like advice prior to attempting a repair, please contact **Logitek Electronic Systems** or your reseller.

Firmware Updates

Each module strip has internal memory that is field upgradeable. **Logitek Electronic Systems** or your local Logitek dealer may from time-to-time supply firmware updates to add new features or fix bugs.

Component Replacement

The *ROC* uses standard faders which can be replaced by station technicians.

Fader Replacement

The *ROC* uses a Penny & Giles fader.

Model No. **PGF3210/D/U/--A**

No audio is carried through the fader, just control signals. The fader can be easily replaced with a spare from Logitek or an electronics supplier.

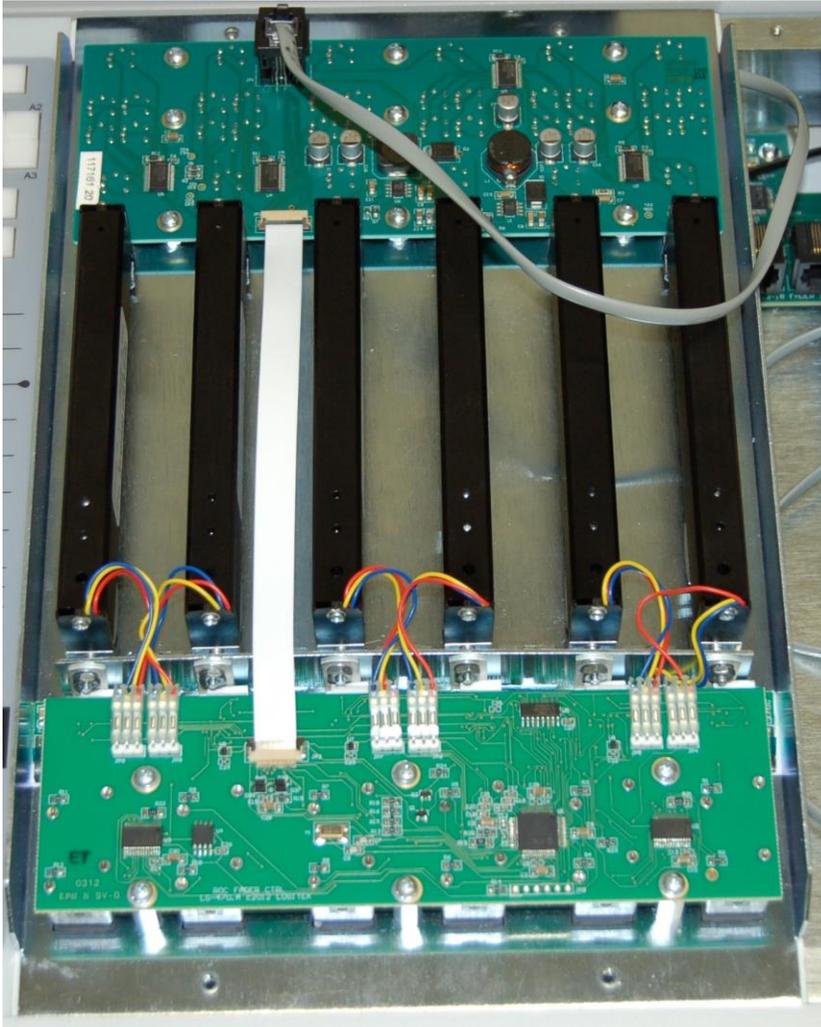


Illustration 4: Underside of the ROC-FADER

To replace a fader:

1. Remove the four screws from the required module.
2. Carefully remove the module from the frame.
3. Disconnect the fader from the main board.
4. Remove the slider cap.
5. Remove the two hex screws that mount the fader to the module.
6. Fit the replacement fader to the module using the two hex screws.
7. Replace the slider cap.
8. Reconnect the fader connector, ensuring the same polarity as the other faders on the module.
9. Replace the module in the frame, and screw it back in.

Module swap-out

If you need to swap a module with an on-site spare, you can simply unscrew the module, disconnect it, connect the replacement and screw it in. Modules are fully hot-swappable – they will refresh their status shortly after powering up.

More Assistance

If you would like more assistance with maintenance and service, please contact **Logitek** or your reseller.

Appendix A Release Notes

Known Issues

Tray cards manufactured before June 2015 have a defective cue circuit. Due to an error in the traces in the ROC-TRAY-IO card, the digital to analog converter chip that feeds the cue speaker will fail over time. Customers with the affected card will receive a corrected tray card to repair the cue circuit.

Appendix B Specifications

ROC Frames

ROC-F9 Frame

- Houses 1x ROC-FADER & 1x ROC-MON
- 12.9" W x 14.3" D x 2.5" H (328mm x 368mm x 63mm)

ROC-F12 Frame

- Houses 2x ROC-FADER & 1x ROC-MON
- 16.8" W x 14.3" D x 2.5" H (427mm x 368mm x 63mm)

ROC-F18 Frame

- Houses 3x ROC-FADER & 1x ROC-MON
- 25.6" W x 14.3" D x 2.5" H (625mm x 368mm x 63mm)

ROC-F24 Frame

- Houses 4x ROC-FADER & 1x ROC-MON
- 32.4" W x 14.3" D x 2.5" H (823mm x 368mm x 63mm)

ROC Modules

Fader Module

No of faders 6

- Features** The Fader Module provides the following features:
- LED-illuminated on/off and control start/stop buttons
 - Penny & Giles 100 mm long throw faders
 - Dedicated controls for four bus assigns
 - Softkey button for talkback or other user-defined function
 - Yellow OLED display capable of displaying 16 character source names and pre-fader meter
 - Available in standard (International) or U.K. configurations

Monitor Module

- Features** The Monitor Module provides the following features:
- Contains controls for main monitor, cue speaker, operator headphone, studio monitor and guest headphone

- Studio, Monitor, and Operator Headphones each have 4 input select hotkey buttons
- 12 programmable softkeys
- Multifunction select knob for input selection, EQ, mode, pan and dynamics adjustment
- Yellow OLED screen displays 16-character source names
- Available in standard (International) or U.K. configurations

Meter Bridges

ROC-SMETER Meter Bridge

Dimensions

Features

The Narrow Meter Bridge provides the following features:

- One 27-LED stereo bar graph meters simultaneously showing peak and VU levels
- 2 LCD screens for metering and text
- LED indicators for studio and microphone tally
- OLED display for naming the meter source

ROC-LMETER Meter Bridge

Dimensions

Features

The Narrow Meter Bridge provides the following features:

- One 27-LED stereo bar graph meters simultaneously showing peak and VU levels
- LCD screen for metering and text
- LED indicators for studio and microphone tally
- OLED display for naming the meter source

ROC Power Supply

Voltage 110 - 230 VAC, automatically selected

Frequency 47 - 63 Hz

Consumption 40 W maximum

Appendix C Pinouts

To JetStream (DATA and HEADPHONES)

Connection to the **JetStream** is via a RJ45 connector mounted on the rear of the frame. Straight through CAT5 cabling is used.

Pin	Connection
1	Cue -
2	Cue +
3	RS485 RX-
4	RS485 TX-
5	RS485 TX+
6	RS485 RX+
7	No connect
8	Ground

Power Supply to Console

Connection between the power supply and console is DB-9 to RJ-45

RJ-45

Pin	Connection
1	
2	
3	
4	
5	
6	
7	
8	

DB-9

Pin	Connection
1	
2	
3	
4	
5	
6	
7	
8	
9	

GPIs

GPI connections are on two DB25 connectors on the power supply. One DB-25 is for inputs and one is for outputs. We recommend terminating GPIs to Krone style (or similar) termination blocks.

GPI Inputs

Pin	Connection	Pin	Connection
1	GPI In 1	14	Ground
2	GPI In 2	15	Ground
3	GPI In 3	16	Ground
4	GPI In 4	17	Ground
5	GPI In 5	18	Ground
6	GPI In 6	19	Ground
7	GPI In 7	20	Ground
8	GPI In 8	21	Ground
9	GPI In 9	22	Ground
10	GPI In 10	23	Ground
11	GPI In 11	24	Ground
12	GPI In 12	25	Ground
13	No Connect		

GPI Outputs

Pin	Connection	Pin	Connection
1	GPI Out 1A	14	GPI Out 1B
2	GPI Out 2A	15	GPI Out 2B
3	GPI Out 3A	16	GPI Out 3B
4	GPI Out 4A	17	GPI Out 4B
5	GPI Out 5A	18	GPI Out 5B
6	GPI Out 6A	19	GPI Out 6B
7	GPI Out 7A	20	GPI Out 7B
8	GPI Out 8A	21	GPI Out 8B
9	GPI Out 9A	22	GPI Out 9B
10	GPI Out 10A	23	GPI Out 10B
11	GPI Out 11A	24	GPI Out 11B
12	GPI Out 12A	25	GPI Out 12B
13	No Connect		

Two Year Limited Warranty

Logitek Electronic Systems, Inc. warrants its professional equipment (excluding Logitek Software, which is covered by a separate warranty) against defects in materials and workmanship for two years pursuant to the following terms and conditions. The warranty extends to the original purchaser only.

LOGITEK will repair or replace, at its option, at its factory without charge professional equipment if a defect in materials or workmanship develops during the first two years following purchase, when the equipment is returned to the factory or LOGITEK authorized service centers freight prepaid with a description of the nature of the failure. No reimbursements can be made for repair charges that are not factory authorized. After repair or replacement, LOGITEK will return the equipment to the purchaser freight prepaid.

In the event that any part of this professional equipment becomes defective during the first two years following purchase, and purchaser wishes to attempt repair, purchaser may obtain a replacement part by notifying LOGITEK of the part of the equipment which has failed. LOGITEK will thereafter ship a replacement part, freight prepaid. LOGITEK may require the purchaser to return the defective part to LOGITEK freight prepaid as a condition of such replacement, either before or after LOGITEK ships the replacement part. LOGITEK shall not be responsible for any other charges or liabilities associated with purchaser-made repairs.

No part or equipment shall be considered defective if it fails to operate due to exposure to extreme temperatures or excessive moisture in the atmosphere.

Light bulbs, batteries, potentiometers or other equipment not manufactured by Seller shall carry only the warranty, if any, of the original equipment manufacturer in effect at the time of shipment of this order; and Seller's obligation under this warranty shall be limited to such adjustment as Seller may obtain from the original manufacturer.

This limited warranty is void if equipment is modified or repaired without authorization; subjected to misuse, abuse, accident, water damage or other neglect; or has had its serial number defaced or removed. No obligation is assumed by LOGITEK to update previously manufactured equipment. Specifications are subject to change without notice. **EXCEPT AS SPECIFICALLY PROVIDED HEREIN, LOGITEK MAKES NO WARRANTY, REPRESENTATION, PROMISE, OR GUARANTEE, EITHER EXPRESS OR IMPLIED, STATUTORY OR OTHERWISE, WITH RESPECT TO THE EQUIPMENT, USER DOCUMENTATION OR RELATED TECHNICAL SUPPORT, INCLUDING THEIR QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. IN NO EVENT WILL LOGITEK BE LIABLE FOR INDIRECT, SPECIAL, INCIDENTAL, TORT, ECONOMIC, COVER, OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OF OR INABILITY TO USE LOGITEK PRODUCTS, EQUIPMENT, OR SERVICES, INCLUDING, WITHOUT LIMITATION, DAMAGES OR COSTS RELATING TO THE LOSS OF PROFITS, BUSINESS, GOODWILL, DATA OR COMPUTER PROGRAMS, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. IN NO CASE SHALL LOGITEK 'S LIABILITY FOR MONEY DAMAGES EXCEED THE AMOUNT PAID BY YOU FOR THE LOGITEK EQUIPMENT OUT OF WHICH SUCH CLAIM AROSE. THE FOREGOING LIMITATIONS SHALL NOT APPLY TO CLAIMS RELATING TO DEATH OR PERSONAL INJURY WHICH ARISE OUT OF PRODUCTS DEEMED TO BE CONSUMER GOODS UNDER APPLICABLE LAW.**

Some states or provinces do not allow the exclusion or limitation of implied warranties or limitation of liability for incidental or consequential damages, so the above exclusion or limitation may not apply to you.

The warranty and remedies set forth herein are exclusive and in lieu of all others, oral or written, express or implied. No Logitek dealer, distributor, agent, or employee is authorized to make any modification or addition to this warranty.